

DL-32E26B/DL-32E28B

2MP HD 4in1 Camera



DWDR



AWB



6KV
Protection



Day&Night



IP67




IK10

Features

- IR distance: 20-30m
- DNR, DWDR
- Lightning Protection up to 6KV
- AHD/TVI/CVI/CVBS video output
- IP67 ingress protection
- IK10
- Video Linkage with Access Control System(BioSecurity 3.0)

Dimensions

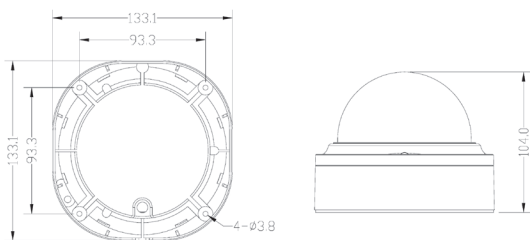

Specifications

| Model | DL-32E26B | DL-32E28B |
|---------------------|---|--------------------|
| Camera | | |
| Image Sensor | 1/2.9" 2MP CMOS | |
| Efective Pixels | 1920*1080 | |
| Shutter Time | 1/25s~1/50,000s (PAL);1/30s~1/60,000s (NTSC) | |
| Image System | PAL/NTSC | |
| Video Frame System | 1080P@25fps (PAL); 1080P@30fps (NTSC) | |
| IR Distance | 20~30m (30 ~ 50m optional) | |
| Video Output | AHD/TVI/CVI/CVBS | |
| Lens | 2.8-12mm Varifocal | 2.8-12mm Motorized |
| Lens Mount | Φ14 | |
| Horizontal FOV | 29°-104° | |
| S/N Ratio | ≥41dB | |
| Functions | | |
| OSD | UTC support based on DVR | |
| AGC | Support | |
| White Balance | Auto/Manual | |
| Day & Night | Auto/Manual | |
| Video Setting | Contrast/Sharpness/Color Gain/ Video Format/DWDR/DNR | |
| Language | Multi-Language | |
| General | | |
| Casing | Aluminium alloy | |
| Ingress Protection | IP67 | |
| Working Environment | -30°C ~ 60°C / Humidity 10%~90°C RH | |
| Power Supply | DC12V±10% 1.5A | |
| Power Consumption | 3.2W MAX (IR cut off) | |
| Dimensions | Φ133.1*104.0mm | |
| Net Weight | 500g | |

