

# **Z8516/32NFR-16P** | Z8000NFR-P series

16/32-Channel 4K & H.265+ Network Video Recorder



#### **Features**

- H.265+/H.265/H.264+/H.264 Decoding
- Support 16/32CH 4K Resolution Preview and Playback
- Support HDMI up to 4K output
- DHCP, FTP, DNS, DDNS, NTP, UPNP, RTSP etc.
- ONVIF Profile S Compatible
- Cloud Service, P2P
- Mobile phone remote monitoring (iOS, Android)
- Multi-browser access (IE, Chrome, Firefox, Safari)













# **System Overview**

ZKTeco Z8000NFR -16P series could deliver up to 4K resolution excellent image over advanced H.265+ decoding. It's the ideal consideration for the balance of quality, performance and budget.

The friendly GUI provides intuitive shortcut operations, remote control and management, flexible storage and playback. It's widely used for the government, banking sectors, manufacturers, educational or commercial projects.

Powered by the strong interoperability and Onvif Profle S, it's compatible with plenty of 3rd party IPC or crossing platform VMS.

### **Functions**

#### Up to 4K Resolution Preview or Playback

IVA (Intelligent Video Analysis) supported, it allows detecting multiple object behaviors, like target counting, tripwire, intrusion, objects left/missing.

#### **HDD** Ouota

Flexibly assign the specified channels to be recorded in the appointed HDD.

#### AntarView Pro

Flexibly and remotely monitoring at anytime or anywhere with AntarView Pro APP.

# **Technical Parameters**

| Model | Z8516NFR-16P | Z8532NFR-16P |
|-------|--------------|--------------|
|       |              |              |

### System

| Processor        | Multi-core Embedded Processor |
|------------------|-------------------------------|
| Operation System | Embedded Linux                |

#### **IVA Alarm**

| Local IVA Functions | Target Counting, Object<br>Detection, Intrusion, Tripwire |
|---------------------|---|
| Regular Detection   | Motion Detection/Video<br>Tampering/Video Loss            |

## I/O Port and Storage

| Network Interface | 1 RJ-45 port(10/100Mbps)                |
|-------------------|---|
| USB               | 2*USB 2.0                               |
| HDMI              | 1*4K HDMI                               |
| VGA               | 1*VGA                                   |
| Alarm Input       | N/A                                     |
| Alarm Output      | N/A                                     |
| HDD               | 2 SATA, up to 8TB capacity for each HDD |
| RAID              | N/A                                     |
| PoE Ports         | 16                                      |

## Playback and Backup

| Playback Channel  | 16   | 32               |
|-------------------|--|------------------|
| Search Mode       | IVA Search/Time/   | Motion Detection |
| Playback Function | Play, Stop, Play forward, Play backward, 30 seconds forward, 30 seconds backward, Fast play, Slow play, Single frame play, Hide/Show the time bar, Backup, Snapshot, Full screen |                  |
| Backup Mode       | USB device   | e/Network        |

### Video/Audio

| Max. IPC Input    | 16  | 32   |
|-------------------|-----|------|
| Audio Compression | G.7 | '11a |
| Two-way Talk      | N,  | /A   |

### Recording

| Video Compression    | H.265+/H.265/H.264+/H.264                            |
|----------------------|--|
| Recording Resolution | 8MP/5MP/3MP/1080P/960P/720P                          |
| Incoming Bandwidth   | 80Mbps   |
| Bitrate              | 16K~8Mpbs  |
| Record Mode          | Manual/External Alarm/<br>Motion/Scheduled/IVA Alarm |

### Network

| Network Protocol | TCP/IP, HTTP, DDNS, SMTP(SSL),<br>DHCP, PPPoE, UPnP, NTP, P2P |
|------------------|---|
| Max. Online User | 5   |
| Mobile App       | AntarView Pro   |
| Interoperability | Onvif Profile S, SDK  |

#### Power

| Power supply | ATX (AC100~240V)  |
|--------------|-------------------|
| Consumption  | ≤20W(Without HDD) |


#### General

| Working Temperature | -10°C ~+55°C     |
|---------------------|------------------|
| Working Humidity    | 10~90%           |
| Dimensions          | 325mm*246mm*50mm |
| Net Weight          | 3KG              |
| Gross Weight        | 3.5KG            |

### **Ordering Information**

| Туре            | Part Number   | Description           |
|-----------------|---------------|-----------------------|
| Non PoF NVR     | Z8516NFR -16P | 16 channel 2 SATA NVR |
| THOM I BE INVIT | Z8532NFR -16P | 32 channel 2 SATA NVR |

#### Dimensions (mm)

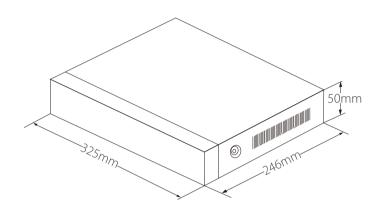

### **Rear Panel**

